

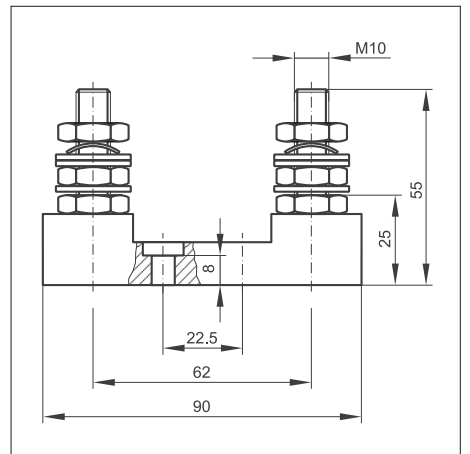


**Fuse-bases  
for stripe fuses  
to DIN 43560  
1, 2 and 3 pole types**



**B 101e**

## Fuse-bases for stripe fuses

Fuse holders for stripe fuses to DIN 43560 are designed for use in battery powered vehicles covering voltages up to 80 V. Fuse ratings may range from 50 A to 425 A.

We offer fuse holders admitting 1, 2 or 3 stripe fuses. Tie bars for 2 or 3 poles are available.



The fuse holders are designed for a wide range of ambient temperatures. Hexagonal screws, bolts and washers are made from nickel-plated brass.

Copper sheet tie bars are available for our 2 and 3 pole fuse holders.


Description	Ordering code	Weight
Fuse holder 3 pole type	SH-3P	approx. 450 g
Fuse holder 2 pole type	SH-2P	approx. 300 g
Fuse holder 1 pole type	SH-1P	approx. 150 g
Tie bar 3 pole type	VS-SH-3P-32,5-3	approx. 40 g
Tie bar 2 pole type	VS-C165-32,5	approx. 25 g

## Device outline



### ● 3-pole fuse holder:

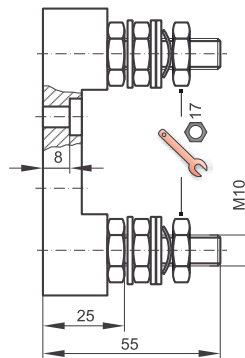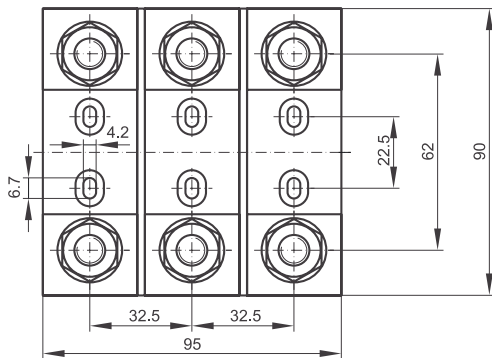


### ● 3-pole tie bar:

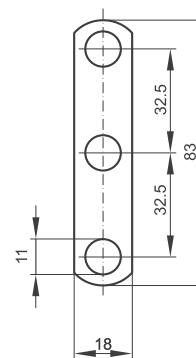

### ● 2-pole fuse holder:

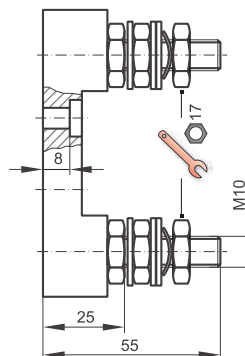
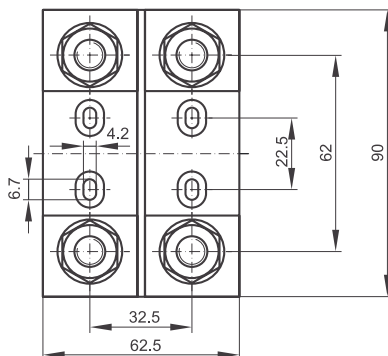


### ● 2-pole tie bar:

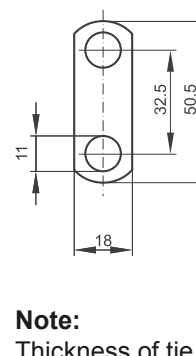

**Note:**  
Thickness of tie bars 3 mm.

### ● 1-pole fuse holder:

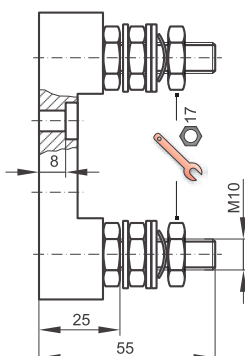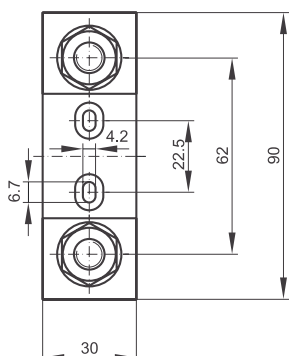

Dimensions in mm

### Mounting instructions:

The lower hexagonal nut was tightened by 4 Nm. All other nuts to be tightened by 16 Nm max.